


Technical datasheet

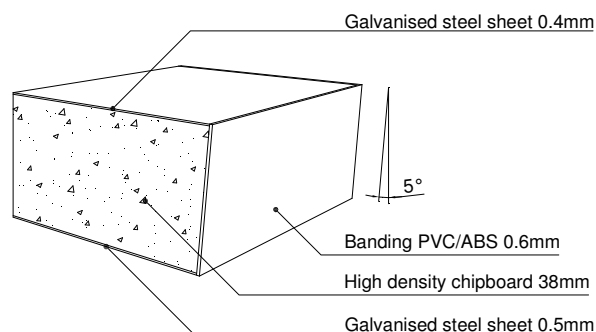

38 HSS-D620

Tested according the European norm 12825

General characteristics

Measurements	:	600 x 600 mm
Weight	:	+/- 11,33 kg
Core	:	38 mm chipboard - density 620 kg/m ³ - E1
Bottom side	:	Galvanised steel 0,5 mm
Upper side	:	Galvanised steel 0,4 mm
Edge banding	:	PVC/ABS 0,6 mm

System characteristics

Class of element	:	2	-	3
Ultimate load	:	≥ 6 kN	-	≥ 8 kN
Safety factor	:	2	-	2
Point load	:	3 kN	-	4 kN
Class of deflection (max 2,5 mm deflection by 3 kN)	:	A	-	C
Divided load per m ² (Theoretical value)	:	15 - 20 kN/m ²	-	20 - 25 kN/m ²

Elektrical resistance

≥ 10⁹ Ω

Other values are possible by the use of conductive banding and glue.

Jansen Products nv

Fabriekstraat 4
3670 Meeuwen
BELGIUM

Tel : +32 11 79 33 00
Fax: +32 11 79 33 01
info@jansenproducts.be
www.groupjansen.com